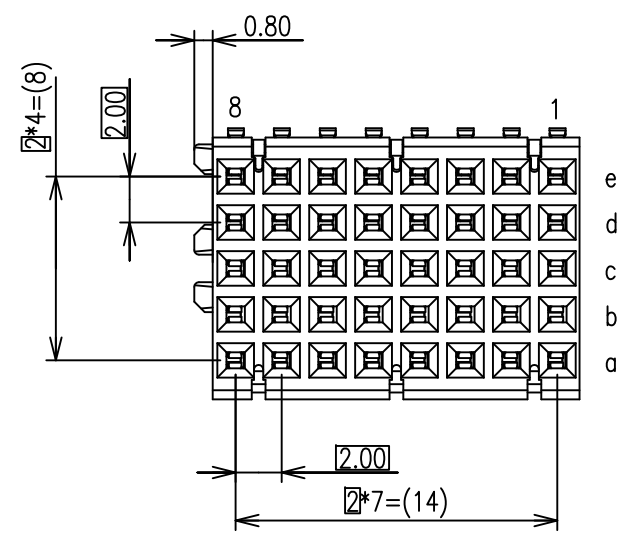
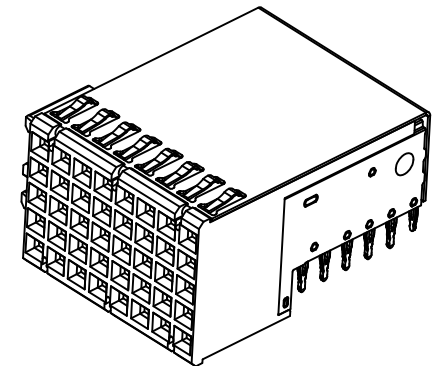
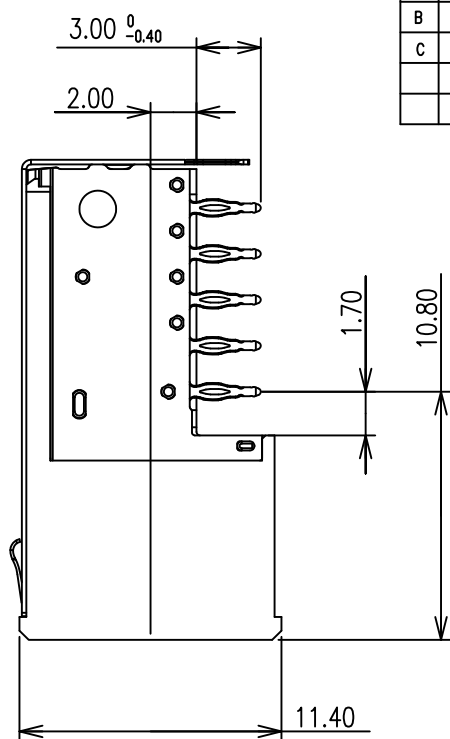
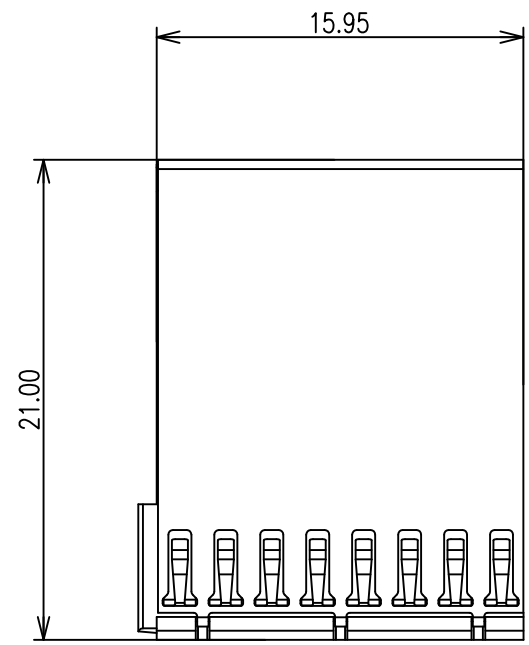

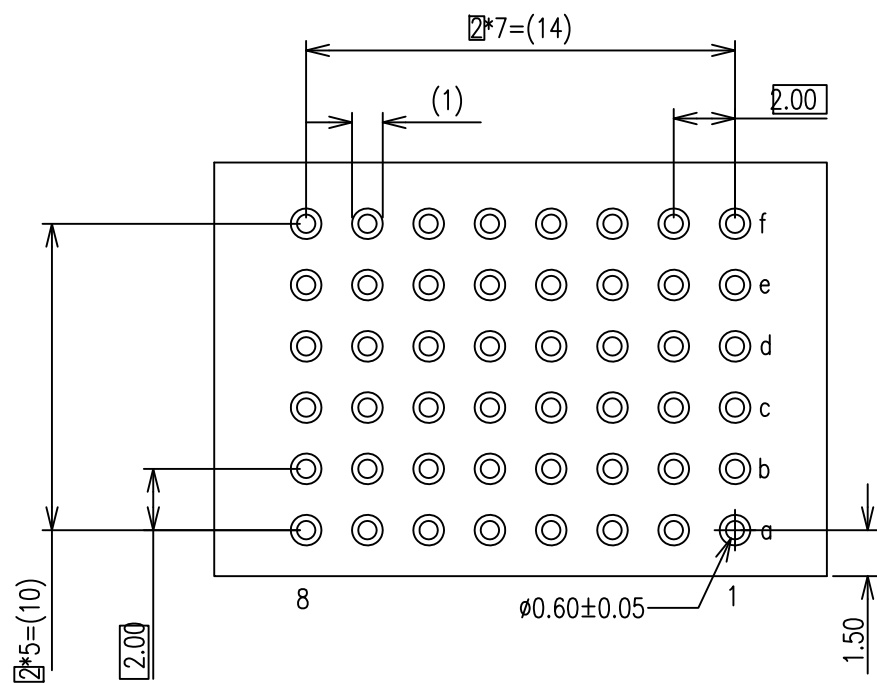


1 2 3 4 5 6 7 8

REV.	ECR	DESCRIPTION	DATE	REVISOR	CHECKED	APPROVED
A	TJECR19024	NEW RELEASE	2018/05/22	Seven.Yuan	Jason.Bian	Dickson.Guan
B	NTECR20001	NEW RELEASE	2020/04/21	Xiang.Chen	Seven.Yuan	Jason.Bian
C	ECR20014	CHANGE OF COMPANY NAME	2020/09/22	Lucien.Lu	Seven.Yuan	Jimmy.Ni



DRAWN	DATE	GENERAL	ANGLES	 益鑫通精密电子有限公司 YXT Precision Electronics Co.,Ltd.
Seven.Yuan	2018/05/22	X. ±0.38	X'. ±3.0°	
DESIGN	DATE	.X ±0.25	.X' ±2.0°	
Seven.Yuan	2018/05/22	.XX ±0.20	.XX' ±1.0°	TITLE
CHECKED	DATE	.XXX ±0.05		2mm HARD METRIC FEMALE TYPE B8 40 Pin CONNECTOR
Jason.Bian	2018/05/22			GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED
APPROVED	DATE			UNIT: mm
Dickson.Guan	2018/05/22			SIZE A4
CUSTOMER DRAWING	SHEET 1 OF 2	SCALE 2:1	REV. C	P/N YXT-HMC-FB80400-01
				DWG NO. C-HMC-5S-07



YXT - HMC - FB8 040 0 - 0 1  
 1 2 3 4

1.TYPE

FB8: FEMALE, TYPE B8

2.POSITIONS

040: 40 PINS

3.POST

0: WITHOUT POST

4.SHIELD

1: WITH SHIELD

NOTES:

1.0:RATING:

1.1:VOLTAGE:500V AC/DC

1.2:CURRENT:1.5 AMPS


1.3:OPERATION TEMPERATURE:-55°C TO +125°C

1.4:CONNECTOR PITCH:2MM

1.5:PERFORMANCE LEVEL:≥250 MATING CYCLES

1.6:PRESSFIT PIN INSERTION:0.6MM±0.05MM AFTER PLATING

1.7:FLAMMABILITY:UL94V-0

DRAWN Seven.Yuan	DATE 2018/05/22	GENERAL X. ±0.38 .X ±0.25 .XX ±0.20 .XXX ±0.05	ANGLES X' ±3.0' .X' ±2.0' .XX' ±1.0'	 益鑫通精密电子有限公司 YXT Precision Electronics Co.,Ltd.		
DESIGN Seven.Yuan	DATE 2018/05/22	GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIDE			TITLE 2mm HARD METRIC FEMALE TYPE B8 40 Pin CONNECTOR	
CHECKED Jason.Bian	DATE 2018/05/22	APPROVED Dickson.Guan	DATE 2018/05/22	UNIT: mm	SIZE A4	P/N YXT-HMC-FB80400-01
CUSTOMER DRAWING		SHEET 2 OF 2		SCALE 2:1	REV. C	DWG NO. C-HMC-5S-07