

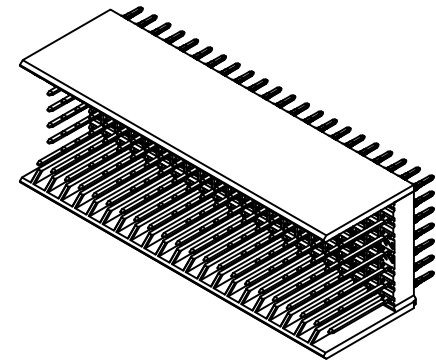
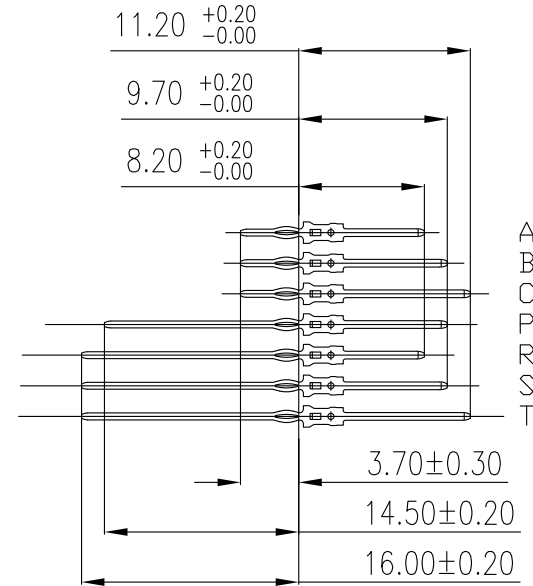
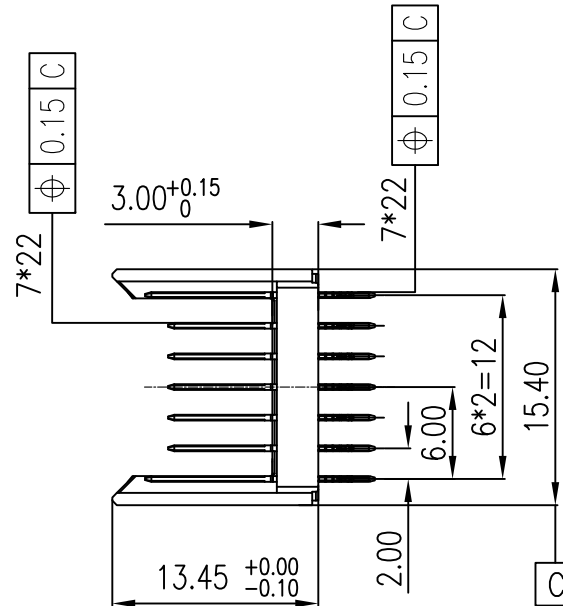
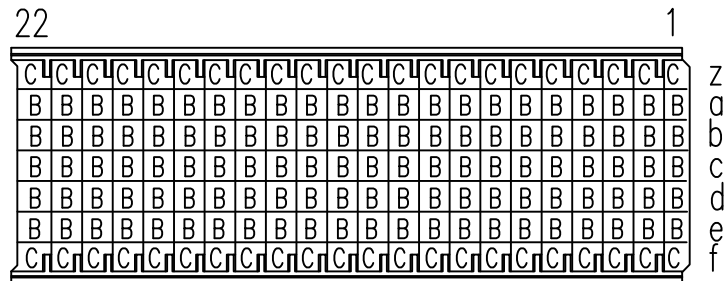
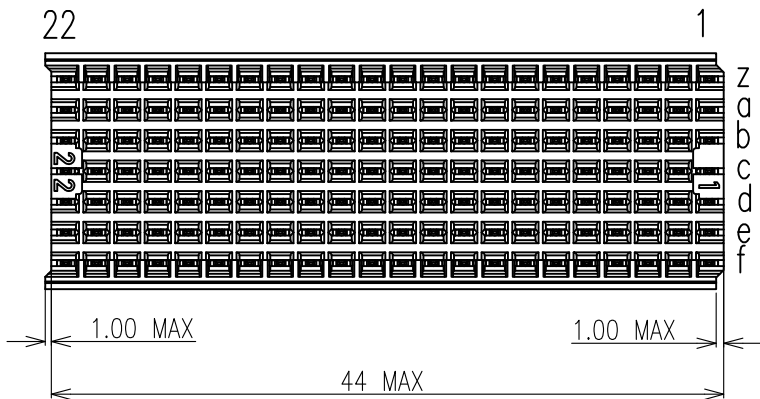


REV.	ECR	DESCRIPTION	DATE	REVISOR	CHECKED	APPROVED
A	NTECR20001	NEW RELEASE	2018/05/22	Snake.Sun	Jason.Bian	Dickson.Guan
B	ECR20014	CHANGE OF COMPANY NAME	2020/08/10	Lucien.Lu	Seven.Yuan	Jimmy.Ni

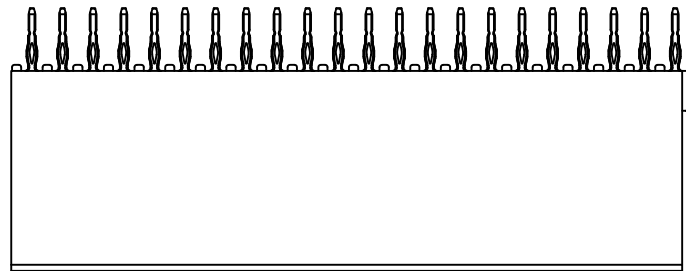

DRAWN	DATE	GENERAL	ANGLES	益鑫通精密电子有限公司 YXT Precision Electronics Co.,Ltd.
Snake.Sun	2018/05/22	X. ±0.38	X'. ±3.0'	
DESIGN	DATE	.X ±0.25	.X' ±2.0'	
Snake.Sun	2018/05/22	.XX ±0.20	.XX' ±1.0'	TITLE
CHECKED	DATE	.XXX ±0.05		2MM HARD METRIC PLUG TYPE B 110PIN CONNECTORS
Jason.Bian	2018/05/22			GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED
APPROVED	DATE			UNIT: mm
Dickson.Guan	2018/05/22			SCALE 2:1
CUSTOMER DRAWING	SHEET 1 OF 2			SIZE A4 P/N YXT-HMC-MB110B-01
				REV. B DWG NO. C-HMC-5P-05

1 2 3 4 5 6 7 8

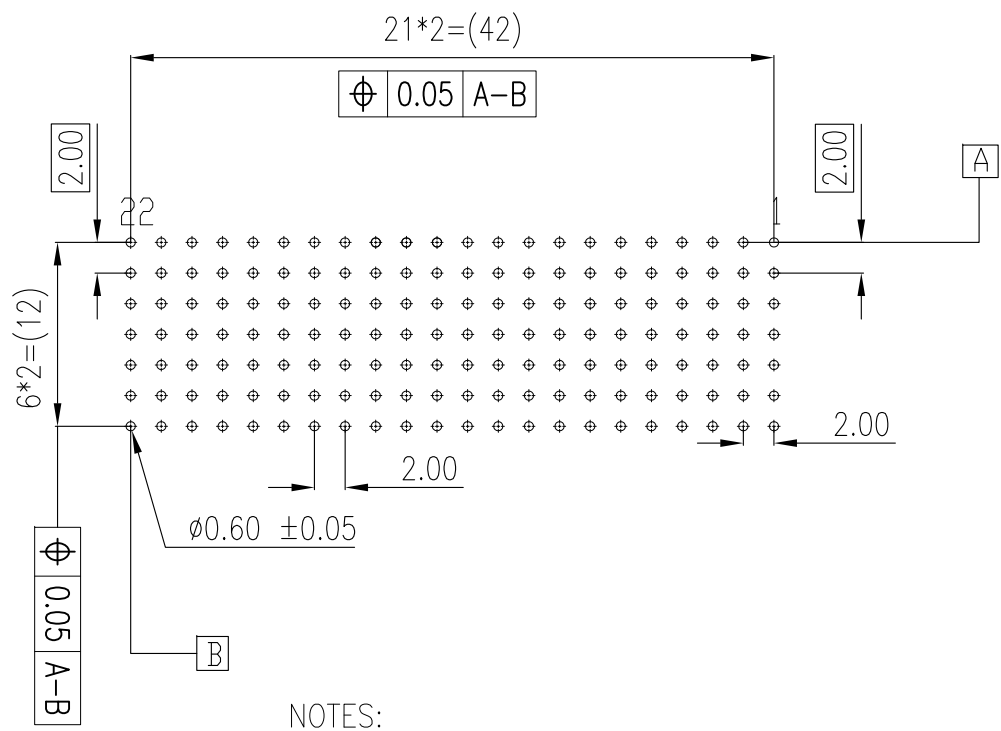

NOTES:

- 1.0:RATING:
- 1.1:VOLTAGE:500V AC/DC
- 1.2:CURRENT:1.5 AMPS
- 1.3:OPERATION TEMPERATURE:-55°C TO +125°C
- 1.4:CONNECTOR PITCH:2MM
- 1.5:PERFORMANCE LEVEL:≥250 MATING CYCLES
- 1.6:PRESSFIT PIN INSERTION:0.6MM±0.05MM AFTER PLATING
- 1.7:FLAMMABILITY:UL94V-0

YXT - HMC - MB 110 B - 0 1  
 1 2 3 4 5 6

- 1.PRODUCT  
HMC:HARD METRIC CONNECTOR
- 2.TYPE  
MB:PLUG TYPE B
- 3.PIN NUMBER  
110:110 PINS
- 4.SIGNAL PIN TYPE  
B:CONTACT B
- 5.POST  
0:WITHOUT POST
- 6.SHIELD  
1:WITH SHIELD(CONTACT C)

DRAWN Snake.Sun 2018/05/22	DATE 2018/05/22	GENERAL X. ±0.38 .X ±0.25 .XX ±0.20 .XXX ±0.05	ANGLES X' ±3.0' .X' ±2.0' .XX' ±1.0'	益鑫通精密电子有限公司 YXT Precision Electronics Co.,Ltd.		
DESIGN Snake.Sun 2018/05/22	DATE 2018/05/22	GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIDE			TITLE 2MM HARD METRIC PLUG TYPE B 110PIN CONNECTORS	
CHECKED Jason.Bian 2018/05/22	DATE 2018/05/22	APPROVED Dickson.Guan 2018/05/22	DATE 2018/05/22	UNIT: mm	SIZE A4	P/N YXT-HMC-MB110B-01
CUSTOMER DRAWING		SHEET 2 OF 2		SCALE 2:1	REV. B	DWG NO. C-HMC-5P-05